

ASSISTED SERVICE CHILLED TIERED DELI - R290 WITH AIRFLOW KIT AF2 (IN/OUT TO OPERATOR SIDE)

FITTING INSTRUCTIONS

ENSURE THERE ARE NO AIR GAPS.


General Installation Considerations

- 1) Area in which display is to be sited must have a minimum room volume no less than 66 cu m (CTD2HT), 82 cu m (CTD3HT) or 95 cu m (CTD4HT).
- 2) Install over a sealed floor or ventilated floor void.
 - 3) Do not site the display within 2m of ceiling mounted air conditioning grilles. 6) Access to maintain condensing unit should be made via removable
 - 4) Do not site the display beneath a high level of direct sunlight.
- 5) Display will operate in a 24 hour environment.
- 6) Access to maintain condensing unit should be made via removabl fascia panels or doors to customer and operator side of counter.

A) WORKTOP CUT-OUT


Model Ref.	Worktop Cut Out Size (mm)		Model Weight
	Length	Width	(in Kg)
CTD2HT + AF2	795	650	111
CTD3HT + AF2	1145	650	133
CTD4HT + AF2	1495	650	161

FIX LIFTING BRACKETS TO FRAME END FLANGES USING SCREWS ALREADY IN FLANGES, THEN LOCATE LIFTING BARS INTO SOUARE HOLES.




FLEXIBLE DUCTING & IN-LINE FAN SUPPLIED LOOSE. RE-ATTACH FLEXIBLE DUCTING & IN-LINE FAN TO SIDE OF COMPRESSOR CRADLE ONCE UNIT HAS BEEN DROPPED INTO PLACE. ELECTRICALY CONNECT FAN TO CONTROL BOX WITH "KETTLE PLUG"


FRONT ISOMETRIC (CUSTOMER SIDE)



D) AIR INTAKE TUNNEL / PLENUM FITTING (OPERATOR SIDE FASCIA PANEL)

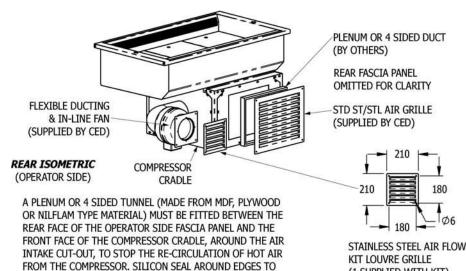


C) FITTING INTO COUNTER WORKTOP

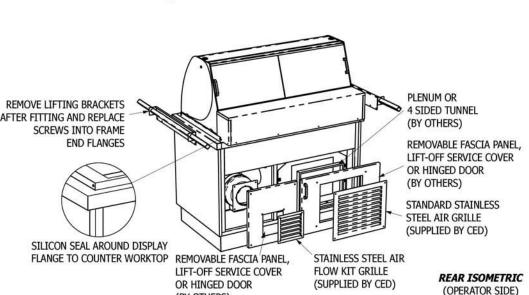

(BY OTHERS)

E) FITTING OF LOUVRE GRILLES

(1 SUPPLIED WITH KIT)





Tel. 01254 238 282 Fax. 01254 238 228 e-mail: aftersales@cedlimited.com