

SERVICE COLUMNS

Washing and disinfection

Principle

Cladding of water pipes not in partitions.

Options: wash basin and/or disinfecting stations.

GENERAL SPECIFICATIONS

Made of food quality stainless steel with a chromium content greater than 17.5%.

- wall mounted (installation possible after positioning of pipes)
- 2-part column (the top part varies according to the clearance under the ceiling of the installation site).
- removable hatch at 1.8 m from floor for access to shut-off valves.
- delivered with paper towel dispenser **ref.806 361**.

NB: the pipe between shut-off valves and the taps are not included, as with any shut-off valves which are to be provided for in the plumbing equipment.

Equipment according to options chosen:

- TS2000 with waste bin **ref.806 402**.
- disinfecting station **ref.806 461** + hose winder **ref.906 524**.

End of service life:


- WEEE recycling channel - Re system' Pro - Syneg.
- Environmental specifications sheet available on request.

Options :

- Connector.




Description	Reference
Column with TS2000 wash basin	605 300
Column with disinfection station	605 301
Column with TS2000 wash basin and disinfecting station	605 302

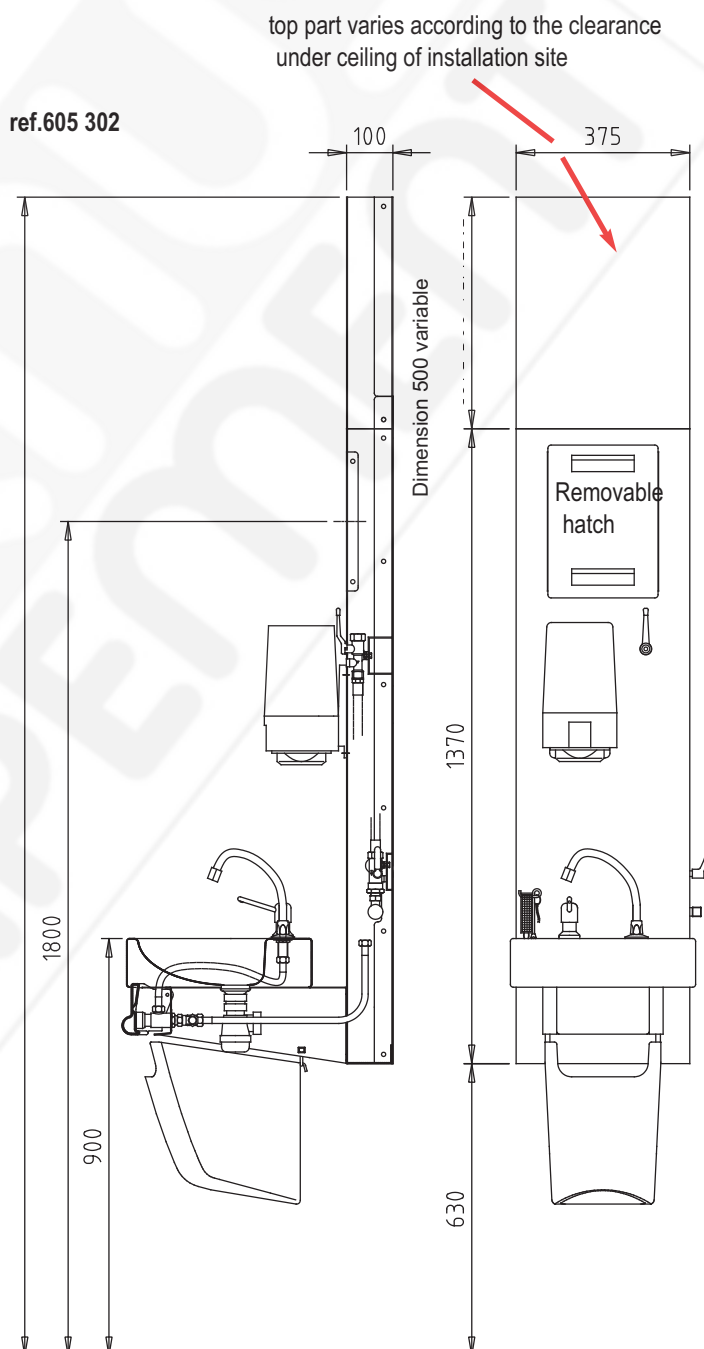

SERVICE COLUMNS Washing and disinfecting

ref.605 300

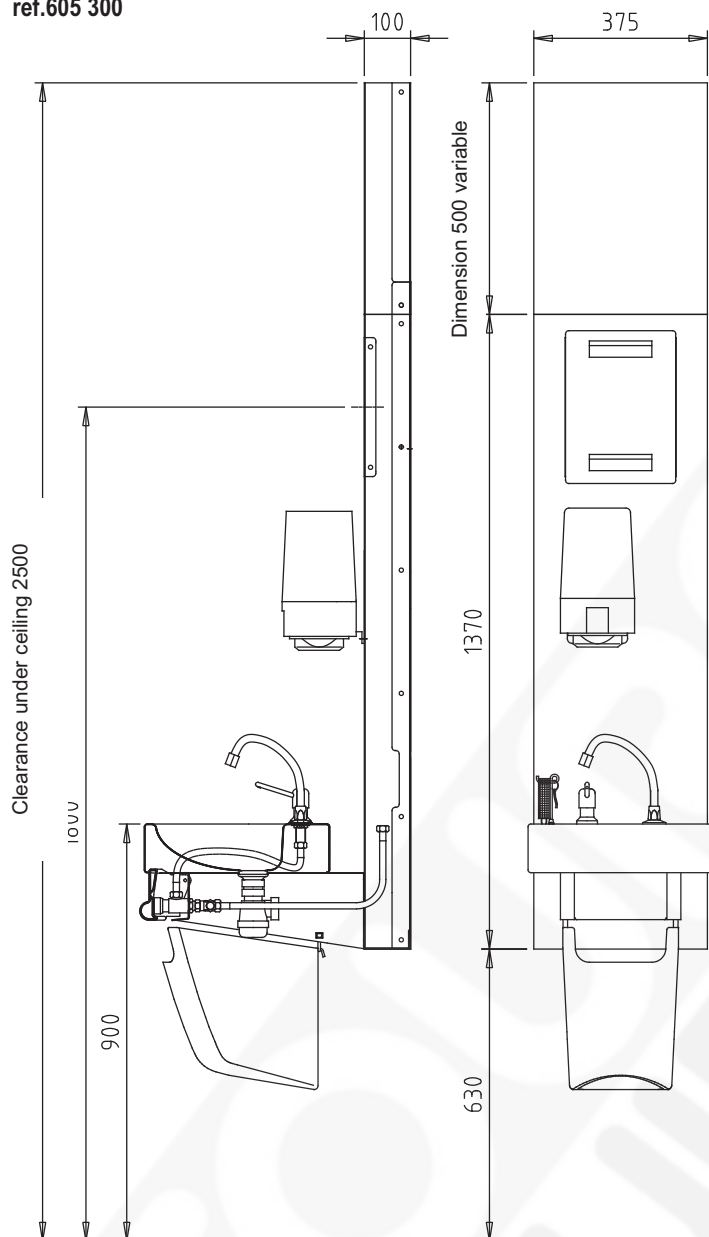

ref.605 301

