



## FREE-STANDING APPLICATION


## A) ROLL UNIT INTO POSITION UNIT SUPPLIED WITH CASTORS



B) ADJUST UNIT HEIGHT
USING SUPPLIED SPANNER
(ENSURE THE HALF NUT IS WOUND FULLY UPWARDS)




C) FIT KICK PLINTH
FRONT & REAR LOCATES WITH MAGNETS



NOTE: KICKPLINTH SUPPLIED
AS STANDARD IS SUITABLE
FOR LOWEST ADJUSTED UNIT HEIGHT

## **COUNTER LOCATED APPLICATION**

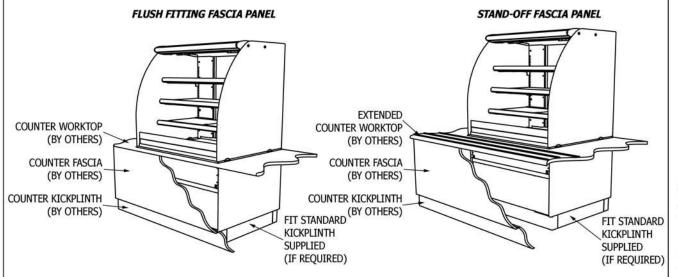

## FITTING SHELVES



LOCATE SHELF SUPPORT BRACKETS INTO REAR SLOTS AT HEIGHT & ANGLE TO SUIT PRODUCTS (NOTE: SHORTEST BRACKETS AT TOP AND LONGEST BRACKETS AT BTM). REST GLASS SHELVES ONTO RUBBER BUMPERS ON SHELF SUPPORTS. (NOTE HALF-LENGTH SHELVES ARE LOCATED ON BOTTOM TO ALLOW FOR TALLER BOTTLES ON DECK)



Tel. 01254 238 282 Fax. 01254 238 228 e-mail: aftersales@cedlimited.com