

# ASSISTED SERVICE CHILLED MULTI LEVEL DELI - R290 - FITTING INSTRUCTIONS


## General Installation Considerations

- 1) Area in which display is to be sited must have a minimum room volume not less than 66 cu m (KCMDL2HT), 82 cu m (KCMDL3HT), 95 cu m (KCMDL4HT) or 122 cu m (KCMDL5HT).
- 2) Install over a sealed floor or ventilated floor void.
- 3) Do not site the display within 2m of ceiling mounted air conditioning grilles.
- 4) Do not site the display beneath a high level of direct sunlight.
- 5) Display will operate in a 24 hour environment.
- 6) Access to maintain condensing unit should be made via removable fascia panels or doors to customer and operator side of counter.

### A) WORKTOP CUT-OUT


Model Ref.	Worktop Cut Out Size (mm)		Model Weight (in Kg)
	Length	Width	
KCMDL2HT+AF1	795	650	132
KCMDL3HT+AF1	1145	650	162
KCMDL4HT+AF1	1495	650	180
KCMDL5HT+AF1	1845	650	201

FIX LIFTING BRACKETS TO FRAME END FLANGES USING SCREWS ALREADY IN FLANGES, THEN LOCATE LIFTING BARS INTO SQUARE HOLES.

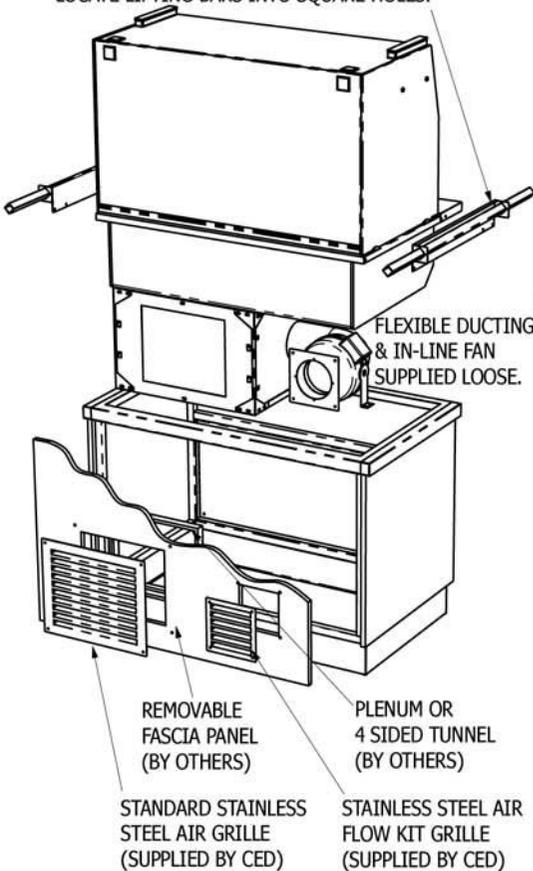

**FRONT ISOMETRIC**  
(CUSTOMER SIDE)


### B) AIR INTAKE & OUTLET CUT-OUTS (CUSTOMER SIDE FASCIA PANEL)

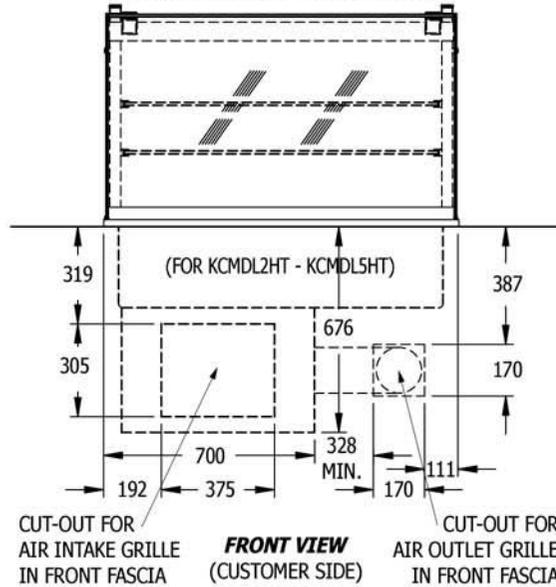


### C) FITTING INTO COUNTER WORKTOP

RE-ATTACH FLEXIBLE DUCTING & IN-LINE FAN TO SIDE OF COMPRESSOR CRADLE ONCE UNIT HAS BEEN DROPPED INTO PLACE. ELECTRICALLY CONNECT FAN TO CONTROL BOX WITH "KETTLE PLUG"

REMOVE LIFTING BRACKETS AFTER FITTING AND REPLACE SCREWS INTO FRAME END FLANGES




SILICON SEAL AROUND DISPLAY FLANGE TO COUNTER WORKTOP

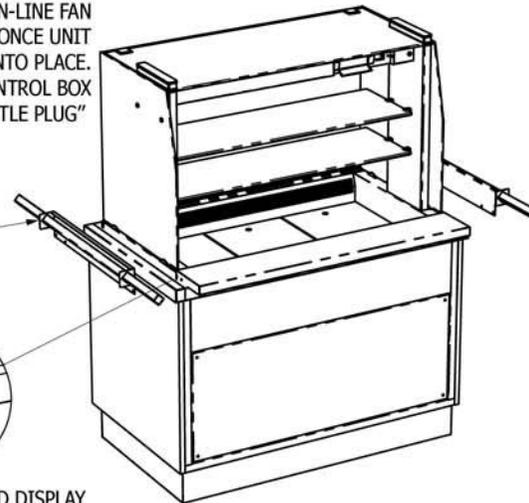

**REAR ISOMETRIC**  
(OPERATOR SIDE)

### D) AIR INTAKE TUNNEL / PLENUM FITTING (CUSTOMER SIDE FASCIA PANEL)

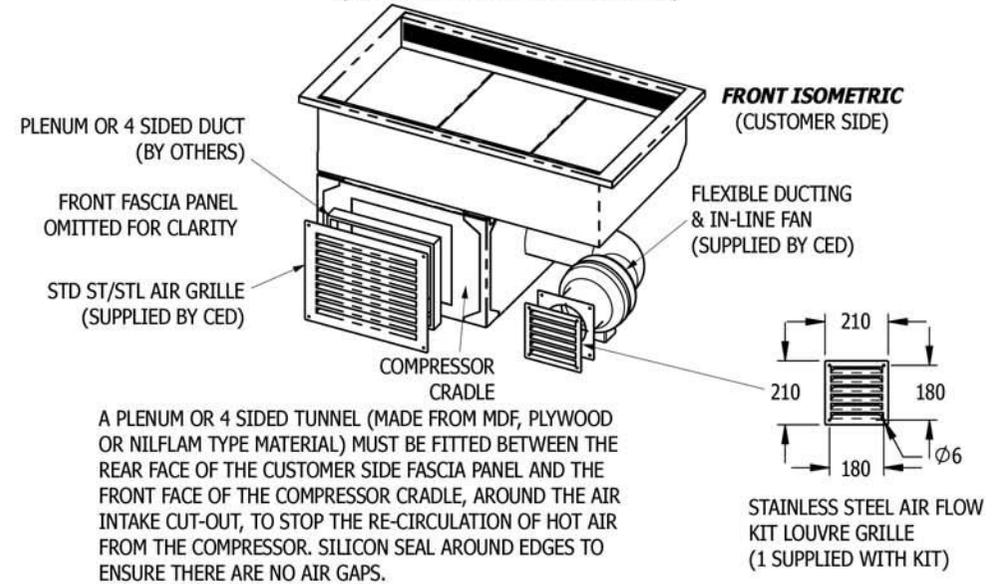

### E) FITTING OF LOUVRE GRILLES

