

ASSISTED SERVICE CHILLED DELI - R290 WITH AIRFLOW KIT SAFI (IN/OUT TO CUSTOMER SIDE)

FITTING INSTRUCTIONS




General Installation Considerations


- 1) Area in which display is to be sited must have a minimum room floor area no less than 17 sq m (SCDL2ASHT & SCDL3ASHT), 20 sq m (SCDL4ASHT) or 28 sq m (SCDL5ASHT).
- 2) Install over a sealed floor or ventilated floor void.
- 3) Do not site the display within 2m of ceiling mounted air conditioning grilles. 6) Access to maintain condensing unit should be made via removable 4) Do not site the display beneath a high level of direct sunlight.
- 5) Display will operate in a 24 hour environment.
 - fascia panels or doors to customer and operator side of counter.


A) WORKTOP CUT-OUT

Model Ref.	Worktop Cut Out Size (mm)		Model Weight
	Length	Width	(in Kg)
SCDL2ASHT+SAF1	795	650	119
SCDL3ASHT+SAF1	1145	650	141
SCDL4ASHT+SAF1	1495	650	172
SCDL5ASHT+SAF1	1845	650	205

FIX LIFTING BRACKETS TO FRAME END FLANGES USING SCREWS ALREADY IN FLANGES, THEN LOCATE LIFTING BARS INTO SQUARE HOLES.

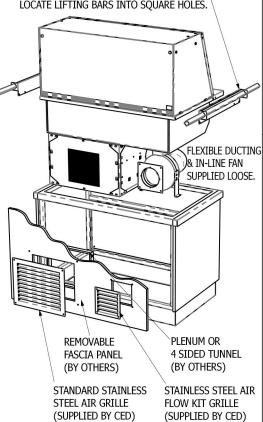




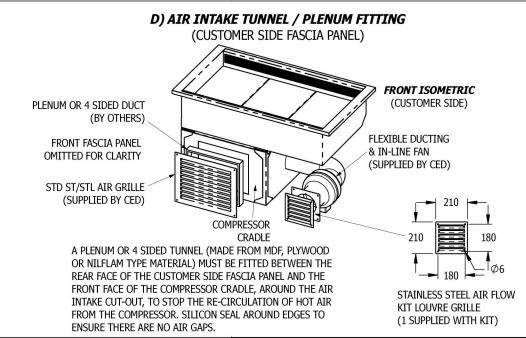


C) FITTING INTO COUNTER WORKTOP

(OPERATOR SIDE)

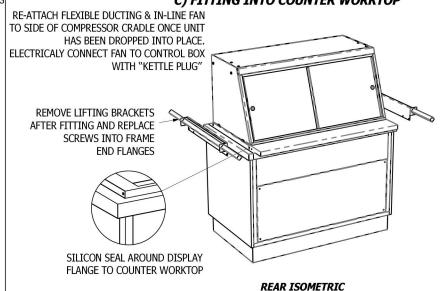

E) FITTING OF LOUVRE GRILLES





Tel. 01254 238 282 Fax. 01254 238 228 e-mail: aftersales@cedlimited.com

FRONT ISOMETRIC

(CUSTOMER SIDE)