

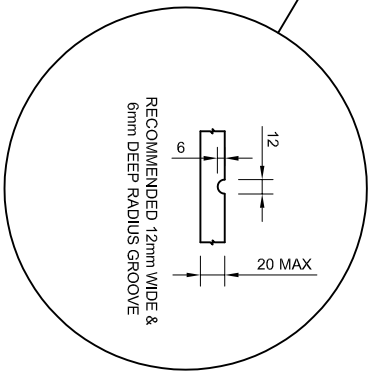
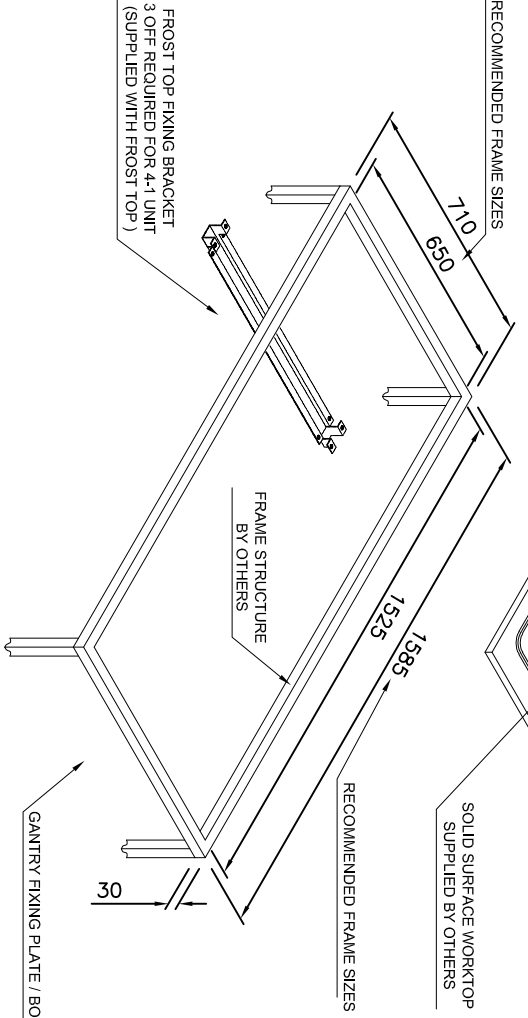
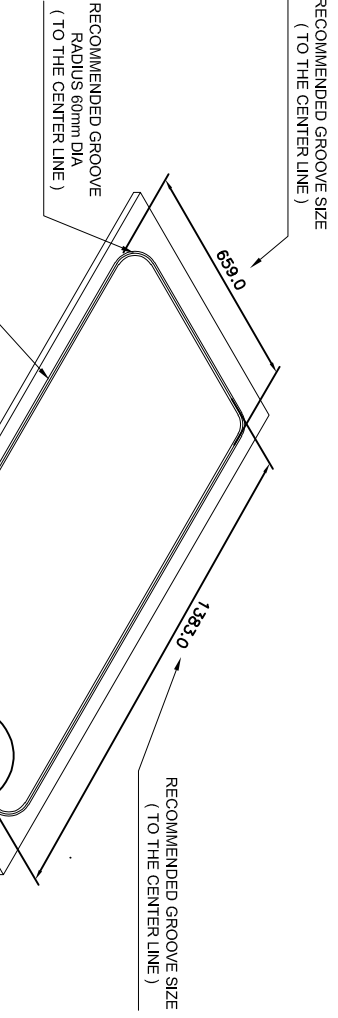
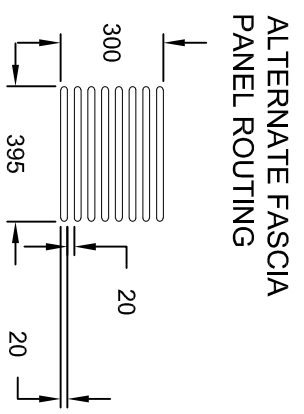


NOTE:-  
THE FROST TOP IS PRE FACTORY SET TO  
ACHIEVE TEMPERATURES BETWEEN -8 TO -10°C  
WHICH IS THE OPTIMUM TEMPERATURE FOR  
PRODUCING FROST ON THE WORKTOP.  
PLEASE CHECK WITH WORKTOP MANUFACTURER  
THAT THE MATERIAL IS ABLE TO PERFORM  
WITHIN THIS TEMPERATURE RANGE.


- INSTALLATION NOTES :
- TEMPERATURE TRANSFER COMPOUND ( SUPPLIED BY - CED ) TO BE APPLIED EVENLY IN BETWEEN SOLID - SURFACE AND FROST TOP.
  - ( !!! SILICONE NOT TO BE USED !!! )
  - ADEQUATE DUCTING REQUIRED FOR CORRECT AIR CIRCULATION ( BY OTHERS ).
  - ELECTRICAL LOAD 3.0kw 13Amp.
  - UNIT SUPPLIED WITH 13A PLUG AND TWO METERS LONG CABLE.
  - GAS CHARGE 0.14 KG ( R290 ).



## Isometric View

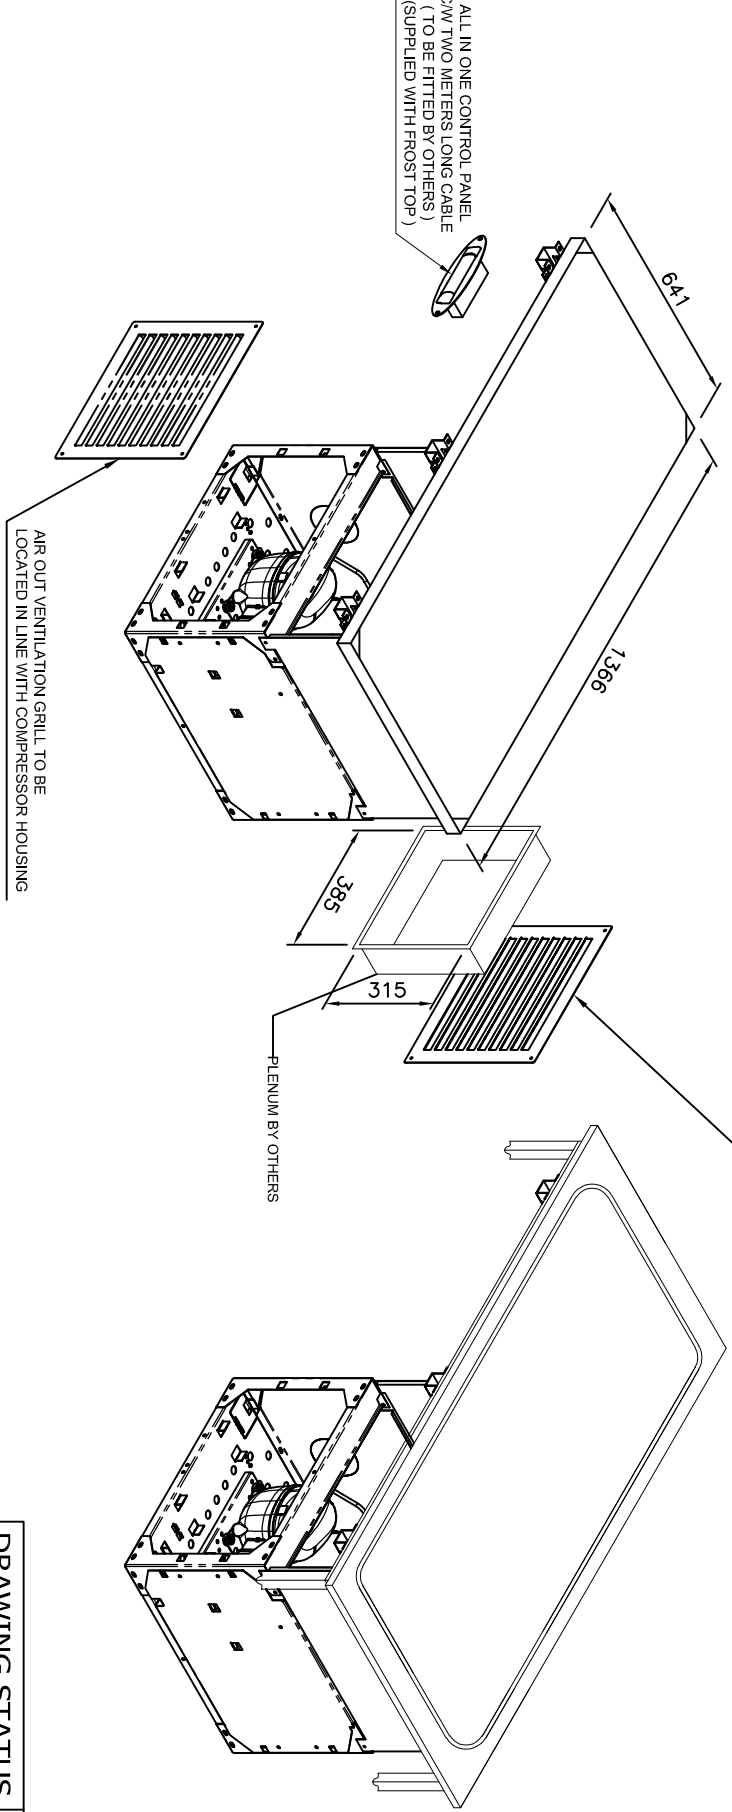

## 4-1 FROST TOP

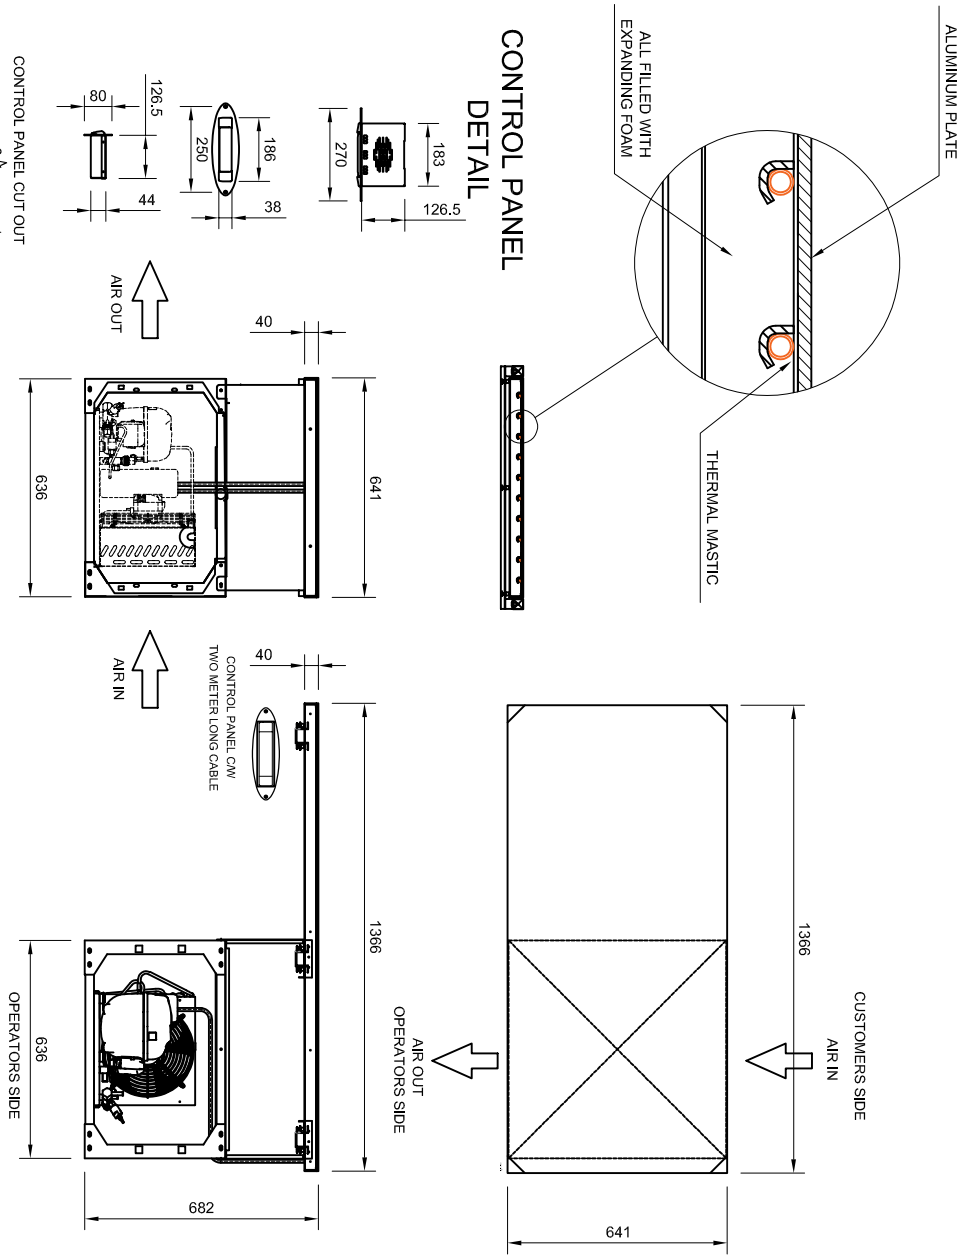

DRAWING STATUS    AWAITING CLIENT APPROVAL

TOLERANCE TABLE		REVISION DETAILS	
1	± 2mm		DATE
1.0	± 0.5mm		
SITE:			
CLIENT:			
DRAWN BY:	MG	ORDER No:	REV No:
SCALE:	1:16 @ A2	DATE:	

DRG No: