





NOTE:- THE FROST TOP IS PRE FACTORY SET TO ACHIEVE TEMPERATURES BETWEEN -8 TO -10°C WHICH IS THE OPTIMUM TEMPERATURE FOR PRODUCING FROST ON THE WORKTOP. PLEASE CHECK WITH WORKTOP MANUFACTURER THAT THE MATERIAL IS ABLE TO PERFORM WITH IN THIS TEMPERATURE RANGE.

INSTALLATION NOTES:

- TEMPERATURE TRANSFER COMPOUND (SUPPLIED BY CED) TO BE APPLIED EVENLY IN BETWEEN SOLID SURFACE AND FROST TOP
- (iii) SILICONE NOT TO BE USED
- ADEQUATE DUCTING REQUIRED FOR CORRECT AIR CIRCULATION (BY OTHERS).
- ELECTRICAL LOAD 3.0kw 13Amp.
- UNIT SUPPLIED WITH 13A PLUG AND TWO METERS LONG CABLE.
- GAS CHARGE 0.17 KG (R290).


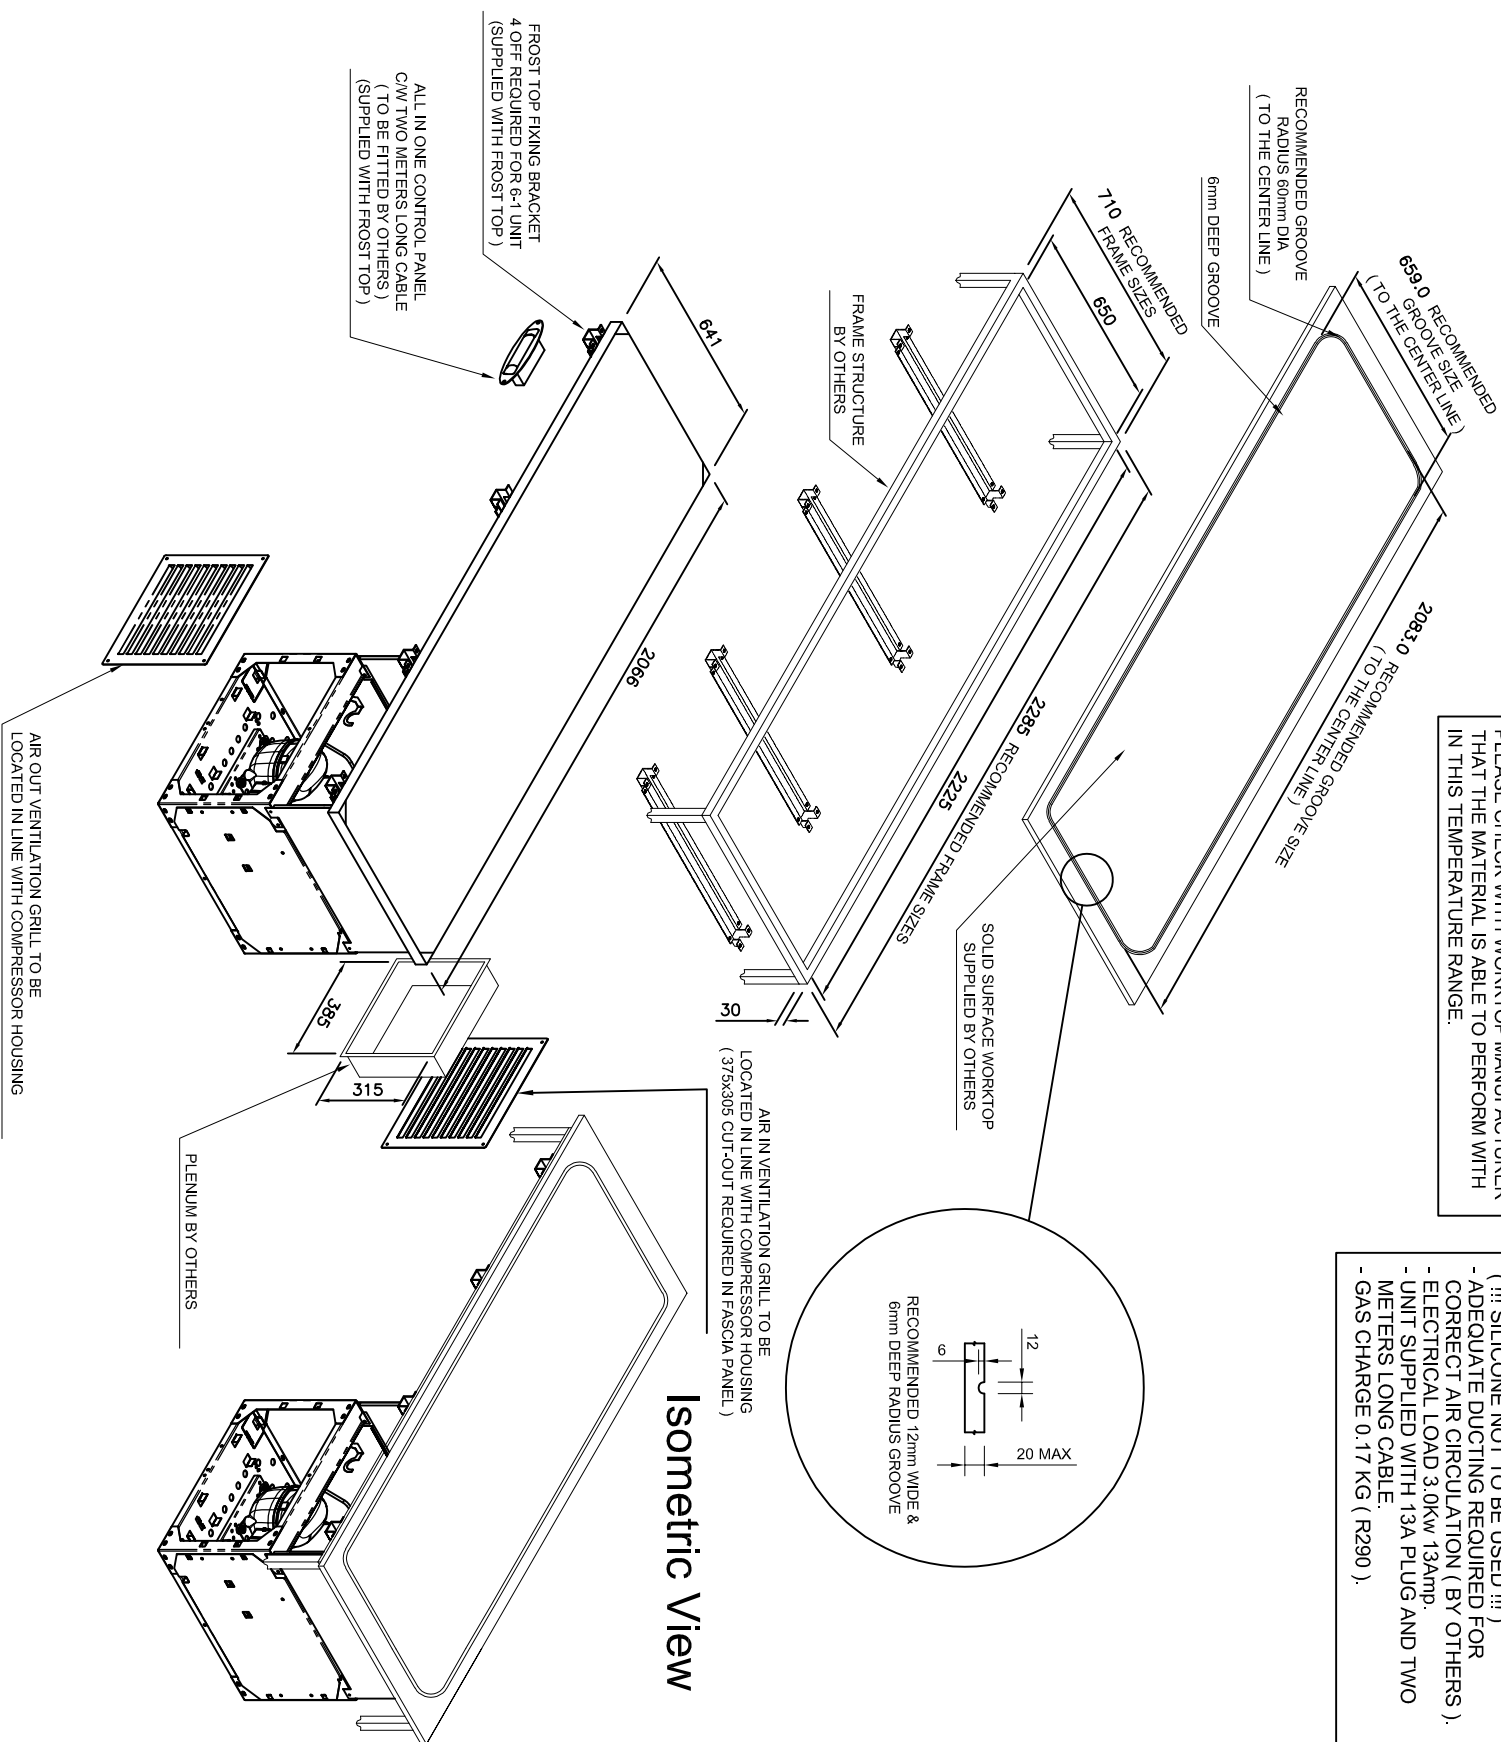


6-1 Frost Top

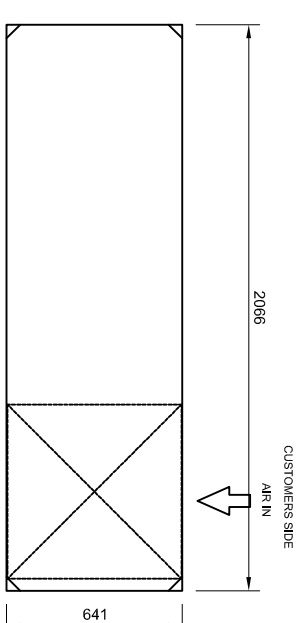

Isometric View

CONTROL PANEL DETAIL

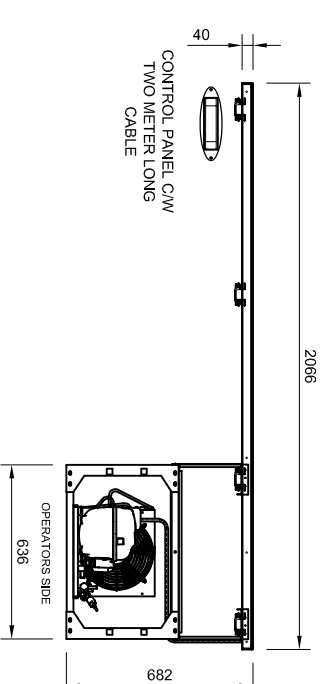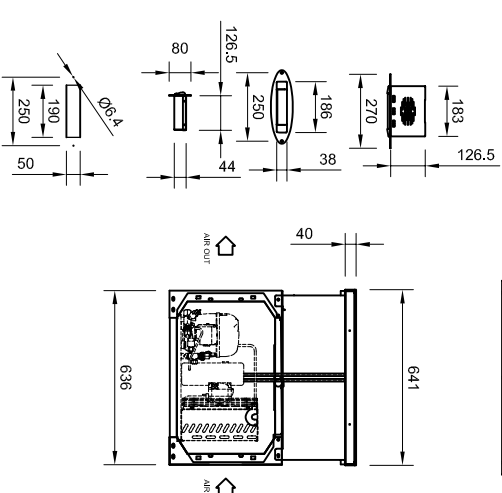

TOLERANCE TABLE		REVISION DETAILS		DATE
1	± 2mm			
1.0	± 0.5mm	-		-
SITE: VIRGIN LOUNGE		-		-
CLIENT: CATERING PROJECTS		TITLE: 6-1 FROST TOP		
DRAWN BY: IWS		ORDER No:	9854	
SCALE: 1:16 @ A2		DRG No: 236466		
DATE: 16/03/2020				