



Ventilation / Display Performance Considerations


- 1) Area in which display is to be sited must have a minimum room floor area no less than 31 sq m.
- 2) Install over a sealed floor or ventilated floor void.
- 3) Do not site the display within 2m of ceiling mounted air conditioning grilles.
- 4) Do not site the display beneath a high level of direct sunlight.
- 5) Display will operate in a 24 hour environment.

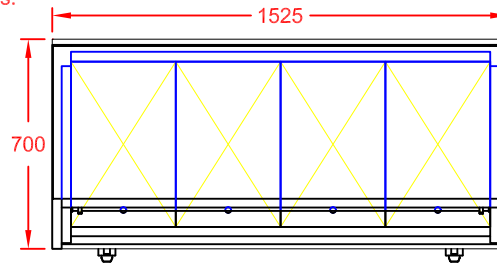


PLAN VIEW

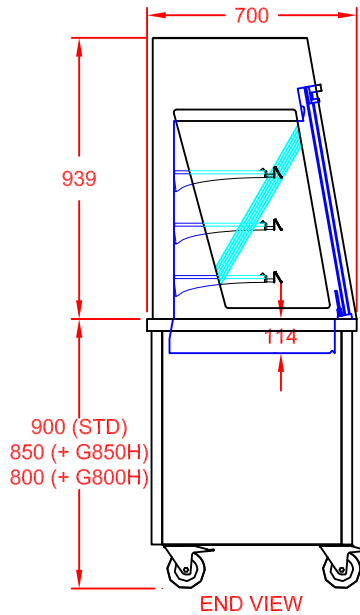

END VIEW

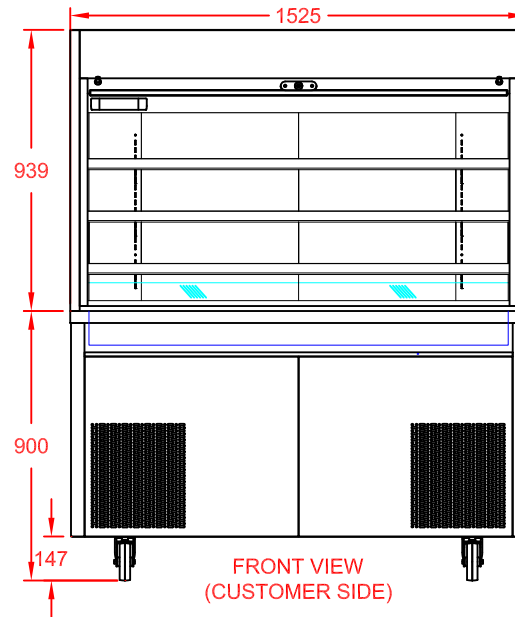

FRONT VIEW
(CUSTOMER SIDE)

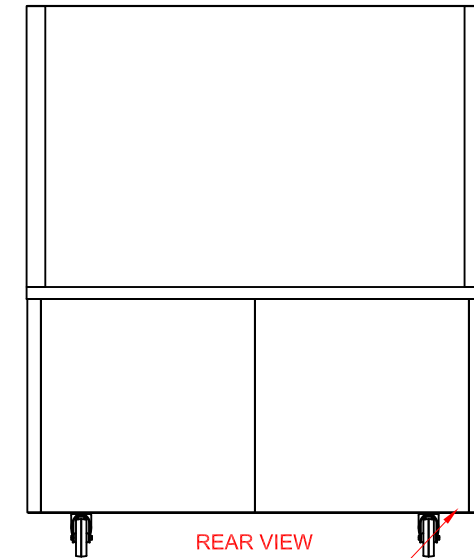

REAR VIEW
(OPERATOR SIDE)

13A PLUG TOP & 3m CABLE ENTRY
POWER SUPPLY: 13A, 230V, 1.74kW

COLOUR FINISH (FRONT & SIDES)	OPTION CODE
MERLIN GREY	STANDARD
OCEAN BLUE	GBLUEWSC4
GOOSEWING LIGHT GREY	GGREYWSC4
POPPY RED	GPREDWSC4
WHITE	GWHITWSC4
FOREST GREEN / HERITAGE	GGRENWSC4
BUTTERMILK CREAM / HONESTY	GCREMWSC4
BLACK	GBLAKWSC4
WALNUT	GWALNWSC4
BEECH	GBEECWSC4
OAK	GOAKWSC4
SATIN S/STEEL	GSSTLWSC4

APPROX. UN-CRATED
WEIGHT OF UNIT: 199Kg



CED FABRICATIONS LTD
UNITS A1-A4, FALCON COURT
CLAYTON BUSINESS PARK
CLAYTON-LE-MOORS
HYNDBURN
LANCASHIRE BB5 5JD

This drawing and information herein is confidential to CED Fabrications Ltd. It is issued in confidence that it will not be disclosed to any third party in part or in whole without permission from CED FABRICATIONS Ltd.

© CED FABRICATIONS LTD



DESCRIPTION:

GLIDE DINING CARTS
4-1 SELF HELP COLD MULTIDECK
(SHUTTER/F.BACK - R290 REFRIGERANT)

SCALE: 1 : 25 @ A4 REV No: A

PRODUCT
CODE:

GMDF4RSHT