


STACKING GASTRONORM SLIDE BAR TROLLEYS

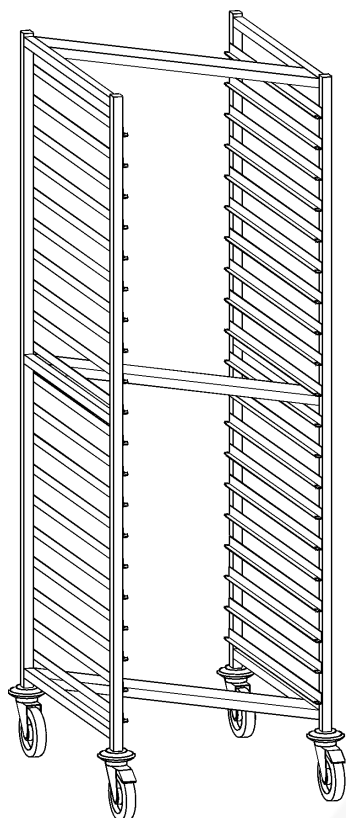

TECHNICAL SPECIFICATIONS:

- food quality stainless steel construction.

Tube structure:

- Uprights 25 x 25 mm section stainless steel tube, thickness 12/10 mm.
- Diagonal spacers, section 25 x 25 mm.

Slide bars:

- Made of bright polished sheet: 12/10 mm thick.
- Slide bars with continuous argon welds with no added metal.
- L-shaped with runner stops at each end.

Wheels:

- 4 swivel wheels Ø 125 mm including 2 braked, with polyamide cover with ball bearings.
- Annular bumpers

Made to request: Trolley with closing bar for transport in a vehicle.

Maximum load: 20 kg per level, maximum 200 kg

Reference	Description	Levels	L (mm)	w (mm)	H (mm)	d (mm)	A (mm)	B (mm)	Weight
804 229	Stackable GN 1/1 bar slide trolley	20	653	454	1785	77	332	304	20 kg
804 259	Stackable GN 2/1 bar slide trolley	20	773	659	1785	77	532	504	26 kg

Stacking method
(seen from above)

