
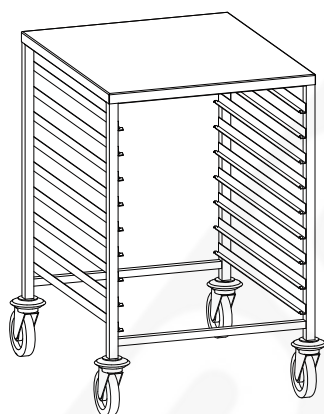


EURONORME SLIDE BAR TROLLEYS

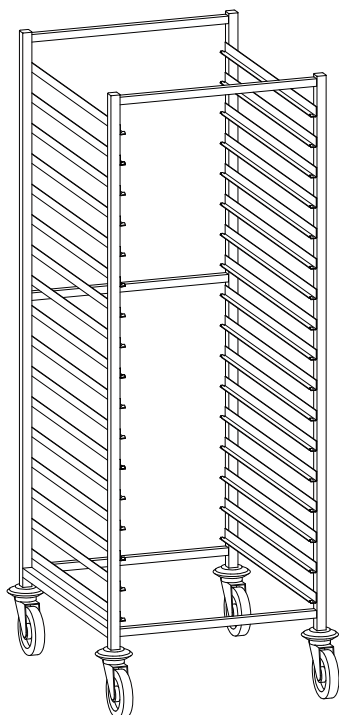

TECHNICAL SPECIFICATIONS:

- Food quality stainless steel construction.
- Trolley 600 x 400 mm for Euronorme containers, grids, trays except for reference 814 306: 800 x 600 mm.

Tube structure:

- Uprights 25 x 25 mm section stainless steel tube, thickness 1,2 mm.
- Spacers 30 x 20 mm section stainless steel tube, thickness 1,2 mm.
- 1 intermediate spacer, stainless steel tube, section 20 x 20 mm, thickness 1,2 mm on all trolleys and 2 spacers on 800 x 600 mm trolley.

Slide bars:

- Made of bright polished sheet: 1,2 mm thick.
- Continuous argon welds with no added metal.
- L-shaped with runner stops at each end.

Wheels:

- 4 swivel Ø 125 mm with polyamide steel cover.
- Annular bumpers.

Maximum load: 20 kg per level, maximum 200 kg
Top shelf 1,5 mm stainless steel sheet on trolley with levels

Made to request: Trolleys with closing bar on trolley for transport in a vehicle.

Ref	Opening (mm)	Levels	L (mm)	I (mm)	H (mm)	e (mm)	A (mm)	B (mm)	Weight
804 155	400	9	725	539	900	70	417	355	17
804 156	400	12	725	539	1785	125	417	355	19
804 157	400	16	725	539	1785	94	417	355	21
804 158	600	16	525	732	1785	94	610	548	20
804 159	400	20	725	539	1785	75	417	355	23
804 160	600	20	525	732	1785	75	610	548	19
804 161	400	20	925	539	1785	75	417	355	27
804 162	600	16	925	732	1785	94	610	548	25
804 163	600	20	925	732	1785	75	610	548	27

