

TM65

Mid-level Report




KHBM5PS+KAS5PS: 5-1Gn Kubus Dry Heat Bain Marie & Heated Midshelf 1875mm
 (Ass. Serve)

Assessment Date 01/10/2025

Manufacturer CED Fabrications

Contact Email sales@cedlimited.com

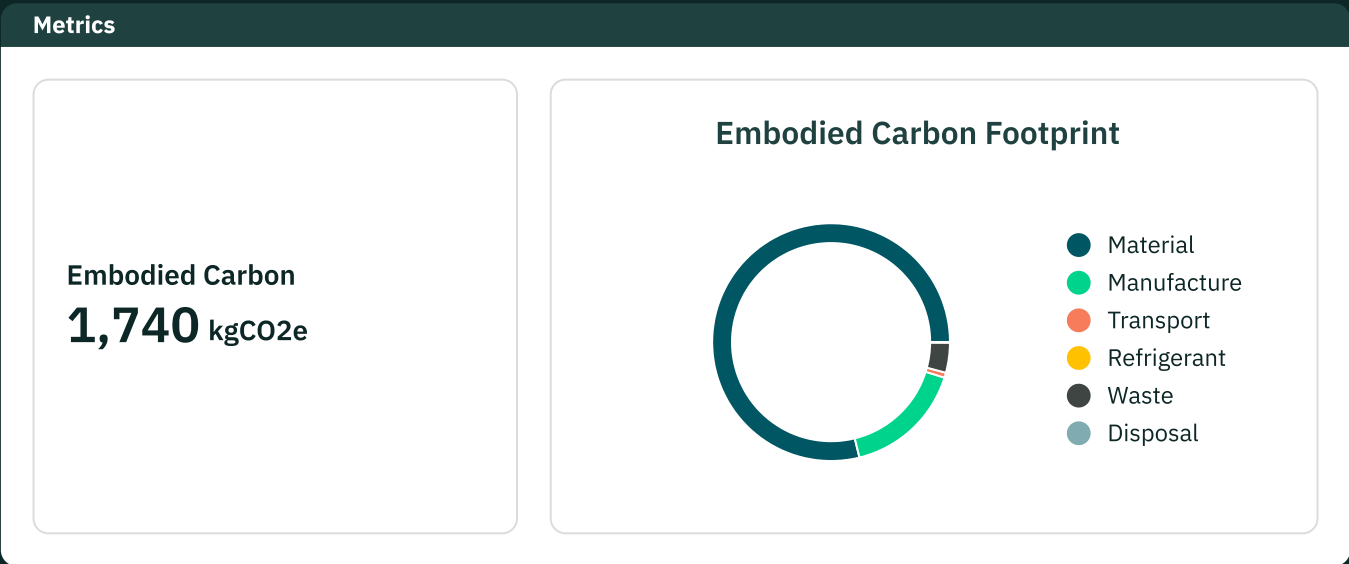

Embodied carbon results (kg CO2e) – breakdown	
A1: Material extraction	789 kgCO2e
A2: Transport	125 kgCO2e
A3: Manufacturing	198 kgCO2e
A4: Transport to site	6 kgCO2e
A5: Construction	N/A
B1: Refrigerant leakage during use	0 kgCO2e
B2: Maintenance (if information given by manufacturer)	N/A
B3: Repair	168 kgCO2e
B4: Replacement	N/A
B5: Refurbishment	N/A
B6: Operational energy	N/A
B7: Operational water	N/A
C1: Refrigerant leakage when decommissioning	0 kgCO2e
C2: Transport	2 kgCO2e
C3: Waste processing	50 kgCO2e
C4: Disposal	0.77 kgCO2e
Embodied carbon results (kg CO2e) – without refrigerant leakage	
A1–C4 without buffer factor (excluding B1, C1)	1339 kgCO2e
A1–C4 with buffer factor (excluding B1, C1)	1740 kgCO2e
Embodied carbon result (kg CO2e) – refrigerant leakage only	
B1 (refrigerant leakage during use) + C1 (refrigerant leakage at end of life)	N/A
Embodied carbon result with 'mid-level' calculation method – total	
Result of 'mid-level' calculation method	1,740 kgCO2e
Assumptions	
A1: Material carbon coefficient source	CIBSE TM65, Table 2.1
B1: Refrigerant annual leakage rate (%)	N/A
C1: Refrigerant end of life recovery rate (%)	N/A
B3: Materials replaced as part of repair (%)	8
C4: Percentage of product going to landfill (%)	55

Bill of Materials

Component name	Manufacturer name	Quantity
HBM5B Dry Heat Bain Marie - Base	CED Fabrications	1
KAS5PS 5-1Gn KUBUS HEATED PS UNIT GANTRY OPTION 1875mm (AS) - c/w HEATED PS MIDSHELF	CED Fabrications	1