

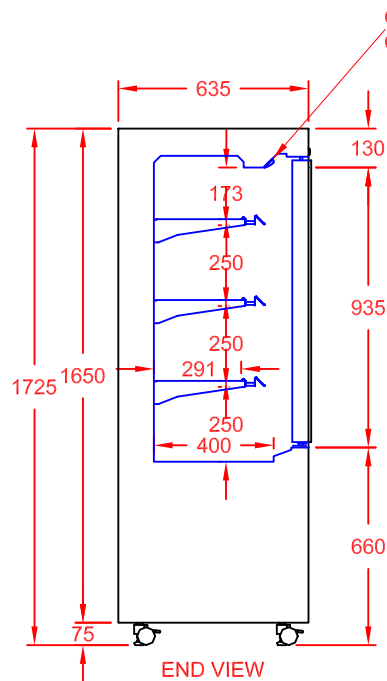


Ventilation / Display Performance Considerations


- 1) Area in which display is to be sited must have a minimum room floor area no less than 31 sq m.
- 2) Install over a sealed floor or ventilated floor void.
- 3) Do not site the display within 2m of ceiling mounted air conditioning grilles.
- 4) Do not site the display beneath a high level of direct sunlight.
- 5) Display will operate in a 24 hour environment.

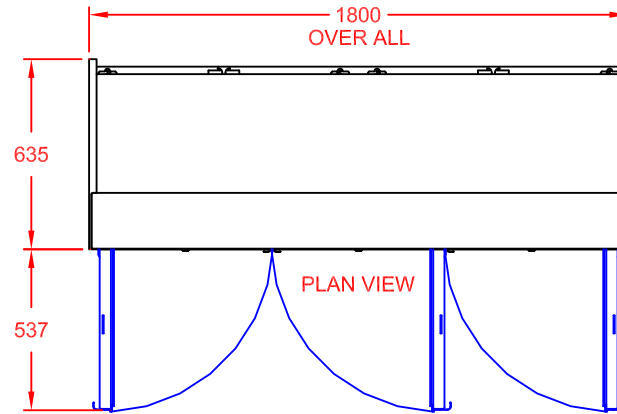

GANTRY MOUNTED DIGITAL CONTROL PANEL

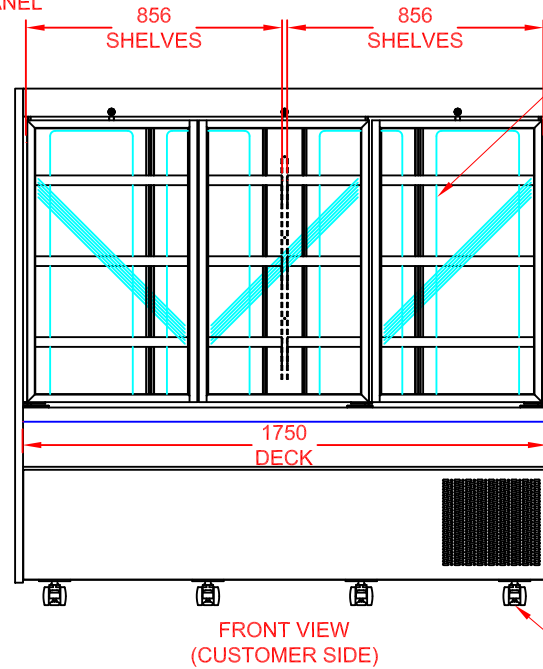

DOUBLE GLAZED LOCKABLE HINGED FRONT DOORS

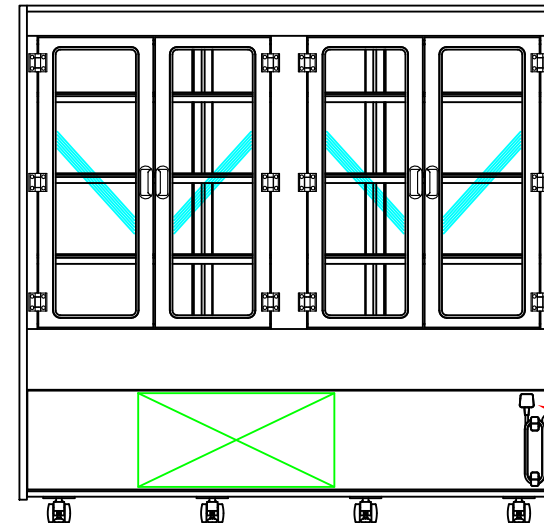

LOCKABLE CASTORS WITH ADJUSTABLE CENTRE FOOT (SPANNER SUPPLIED)

13A PLUG TOP & 2m LEAD
POWER SUPPLY:
13A, 230V, 1.72kW
CAPACITY: 510L

APPROX. UN-CRATED WEIGHT OF UNIT: 288Kg

DESCRIPTION:

MONEY MAKER CHILLED MERCHANDISER
1800mm 3 TIER SLIM (HINGED DOORS)
HYDROCARBON TYPE-R290 REFRIGERANT
WITH REAR HINGED DOORS OPTION

SCALE: 1 : 25 @ A4 REV No: A

PRODUCT CODE:

MM18SHD
+ MMDR18S



CED FABRICATIONS LTD
UNITS A1-A4, FALCON COURT
CLAYTON BUSINESS PARK
CLAYTON-LE-MOORS
HYNDBURN
LANCASHIRE BB5 5JD

This drawing and information herein is confidential to CED Fabrications Ltd. It is issued in confidence that it will not be disclosed to any third party in part or in whole without permission from CED FABRICATIONS Ltd.

© CED FABRICATIONS LTD

