



Ventilation / Display Performance Considerations

- 1) Area in which display is to be sited must have a minimum room floor area no less than 10 sq m.
- 2) Install over a sealed floor or ventilated floor void.
- 3) Do not site the display within 2m of ceiling mounted air conditioning grilles.
- 4) Do not site the display beneath a high level of direct sunlight.
- 5) Display will operate in a 24 hour environment.

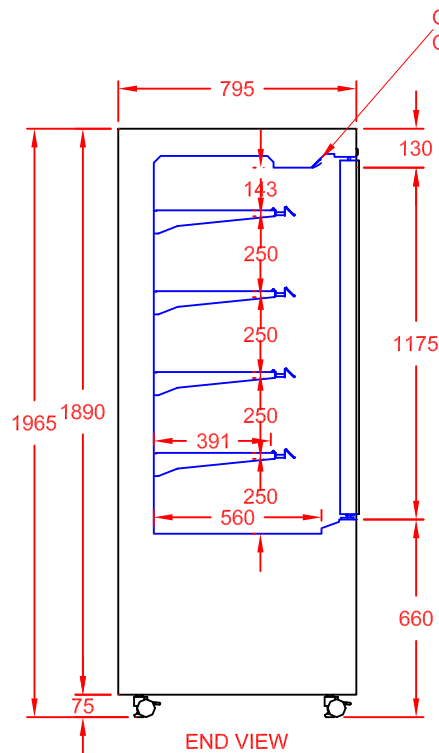


GANTRY MOUNTED DIGITAL
CONTROL PANEL

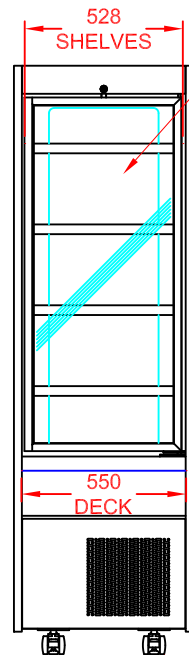

DOUBLE GLAZED
LOCKABLE RH HINGED
FRONT DOOR (STD)
(OPTION FOR LH HINGED
FRONT DOOR: MLHD6L)

LOCKABLE CASTORS
WITH ADJUSTABLE
CENTRE FOOT
(SPANNER SUPPLIED)

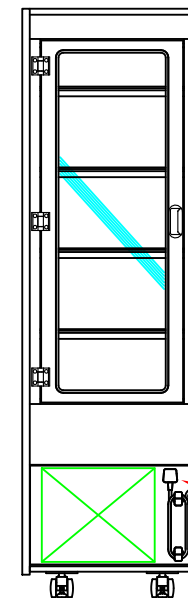

REAR VIEW
(OPERATOR SIDE)

CAPACITY: 260L
APPROX. UN-CRATED
WEIGHT OF UNIT: 202Kg



CED FABRICATIONS LTD
UNITS A1-A4, FALCON COURT
CLAYTON BUSINESS PARK
CLAYTON-LE-MOORS
HYNDBURN
LANCASHIRE BB5 5JD

This drawing and information herein is confidential to CED Fabrications Ltd. It is issued in confidence that it will not be disclosed to any third party in part or in whole without permission from CED FABRICATIONS Ltd.

© CED FABRICATIONS LTD



DESCRIPTION:

MONEY MAKER CHILLED MERCHANDISER
600mm 4 TIER LARGE (HINGED DOORS)
HYDROCARBON TYPE-R290 REFRIGERANT
WITH REAR HINGED DOOR OPTION

SCALE: 1 : 25 @ A4 REV No: A

PRODUCT
CODE:

MM6LHD
+ MMDR6L