



#### Ventilation / Display Performance Considerations

- 1) Area in which display is to be sited must have a minimum room floor area no less than 10 sq m.
- 2) Install over a sealed floor or ventilated floor void.
- 3) Do not site the display within 2m of ceiling mounted air conditioning grilles.
- 4) Do not site the display beneath a high level of direct sunlight.
- 5) Display will operate in a 24 hour environment.

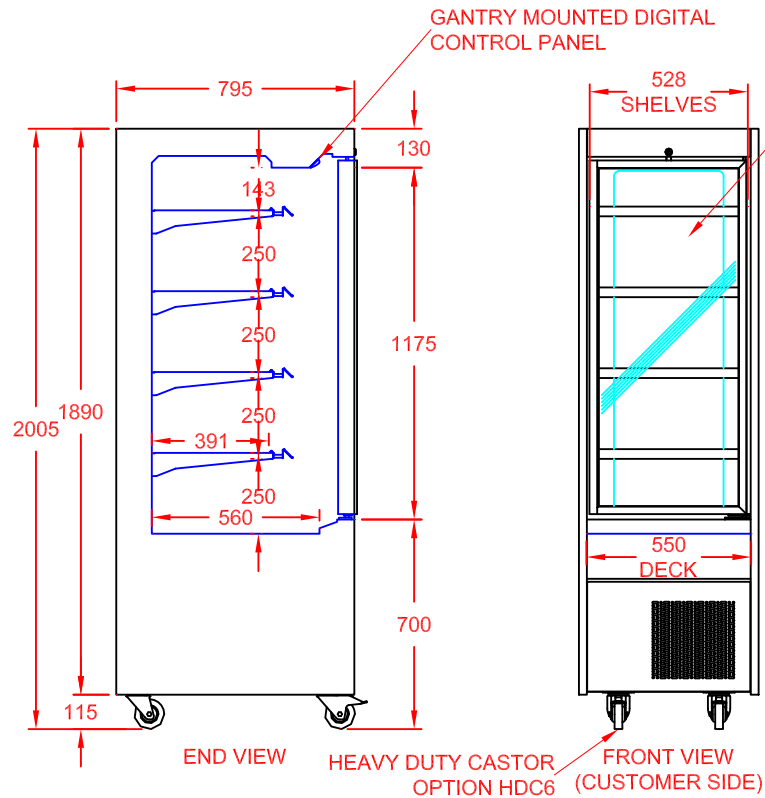

DOUBLE GLAZED  
LOCKABLE RH HINGED  
FRONT DOOR (STD)  
(OPTION FOR LH HINGED  
FRONT DOOR: MLHD6L)

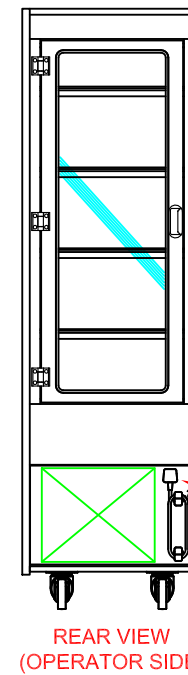

13A PLUG TOP  
& 2m LEAD  
POWER SUPPLY:  
13A, 230V, 1.31kW

CAPACITY: 260L  
APPROX. UN-CRATED  
WEIGHT OF UNIT: 202Kg



CED FABRICATIONS LTD  
UNITS A1-A4, FALCON COURT  
CLAYTON BUSINESS PARK  
CLAYTON-LE-MOORS  
HYNDBURN  
LANCASHIRE BB5 5JD

This drawing and information herein is confidential to CED Fabrications Ltd. It is issued in confidence that it will not be disclosed to any third party in part or in whole without permission from CED FABRICATIONS Ltd.

© CED FABRICATIONS LTD



#### DESCRIPTION:

MONEY MAKER CHILLED MERCHANDISER  
600mm 4 TIER LARGE (HINGED DOORS)  
HYDROCARBON TYPE-R290 REFRIGERANT  
WITH REAR HINGED DOOR OPTION

SCALE: 1 : 25 @ A4 REV No: A

PRODUCT  
CODE: MM6LHD+HDC6  
+ MMDR6L