



Ventilation / Display Performance Considerations

- 1) Area in which display is to be sited must have a minimum room floor area no less than 29 sq m.
- 2) Install over a sealed floor or ventilated floor void.
- 3) Do not site the display within 2m of ceiling mounted air conditioning grilles.
- 4) Do not site the display beneath a high level of direct sunlight.
- 5) Display will operate in a 24 hour environment.

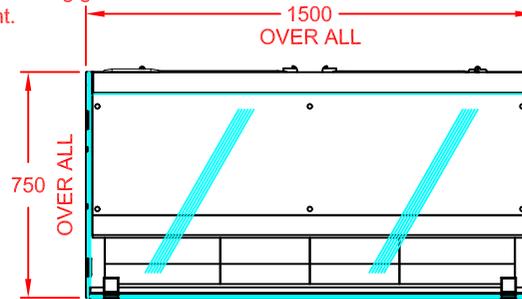


PLAN VIEW

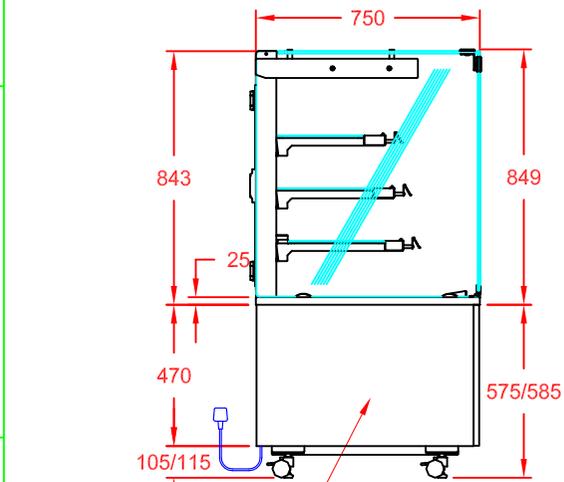


END VIEW

SIDE & FRONT FASCIA  
PANELS IN BLACK  
PLASTISOL AS STANDARD.  
OPTIONAL SATIN ST/STL:  
KSSP = SIDE PANELS,  
KASF15 = FRONT PANELS

13A PLUG TOP  
& 3m LEAD  
POWER SUPPLY:  
13A, 230V, 1.71KW

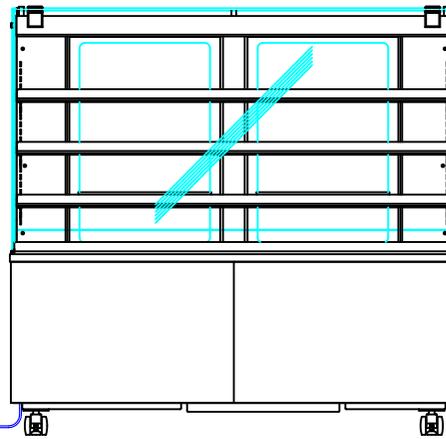

FRONT VIEW  
(CUSTOMER SIDE)

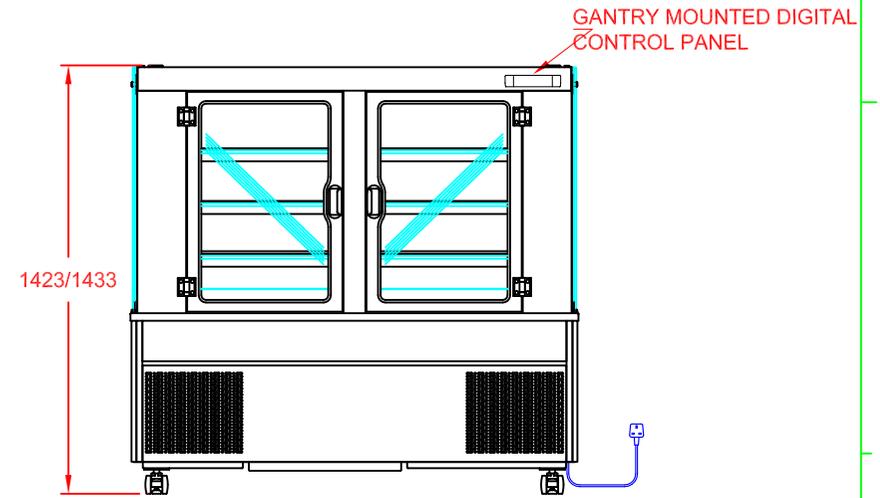

REAR VIEW  
(OPERATOR SIDE)


APPROX. UN-CRATED  
WEIGHT OF UNIT: 298Kg



CED FABRICATIONS LTD  
UNITS A1-A4, FALCON COURT  
CLAYTON BUSINESS PARK  
CLAYTON-LE-MOORS  
HYNDBURN  
LANCASHIRE BB5 5JD

This drawing and information herein is confidential to CED Fabrications Ltd. It is issued in confidence that it will not be disclosed to any third party in part or in whole without permission from CED FABRICATIONS Ltd.

© CED FABRICATIONS LTD



**DESCRIPTION:**

CABINET KUBUS PATISSERIE  
1500mm ASST SERV COLD - REAR DOORS  
HYDROCARBON TYPE-R290 REFRIGERANT

SCALE: 1 : 25 @ A4

REV No: A

PRODUCT  
CODE:

KPC15ASHT