



CLEARING TROLLEYS

1 arched handle





TECHNICAL SPECIFICATIONS:

- Stainless steel tubes, Ø 25 mm thickness 1,2 mm.
- Stainless steel sound-proofed trays:
- Maximum load: 50 Kg per tray
- 4 swivelling wheels Ø 125 mm with polyamide cover including 2 braked, with annular bumpers.
- Delivered under plastic film.
- Options: - hook-on open GN 1/3 trays, depth 200 mm, reference 801 395
- hook-on bag holder, reference 801 538
- scrap bin, reference 801 537

Clearing trolley small model - trays 800 x 530 mm		
Number of trays	Distance between trays H (mm)	Reference
2	560	801 602
3	260	801 603

Clearing trolley, large model - trays 1000 x 600 mm		
Number of trays	Distance between trays H (mm)	Reference
2	560	801 612
3	260	801 613

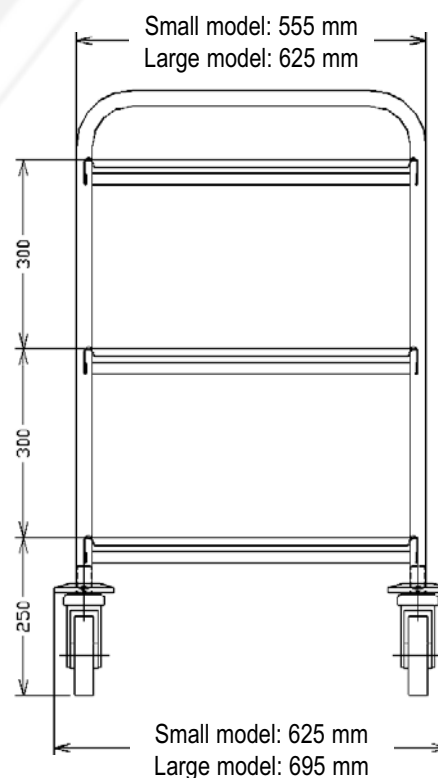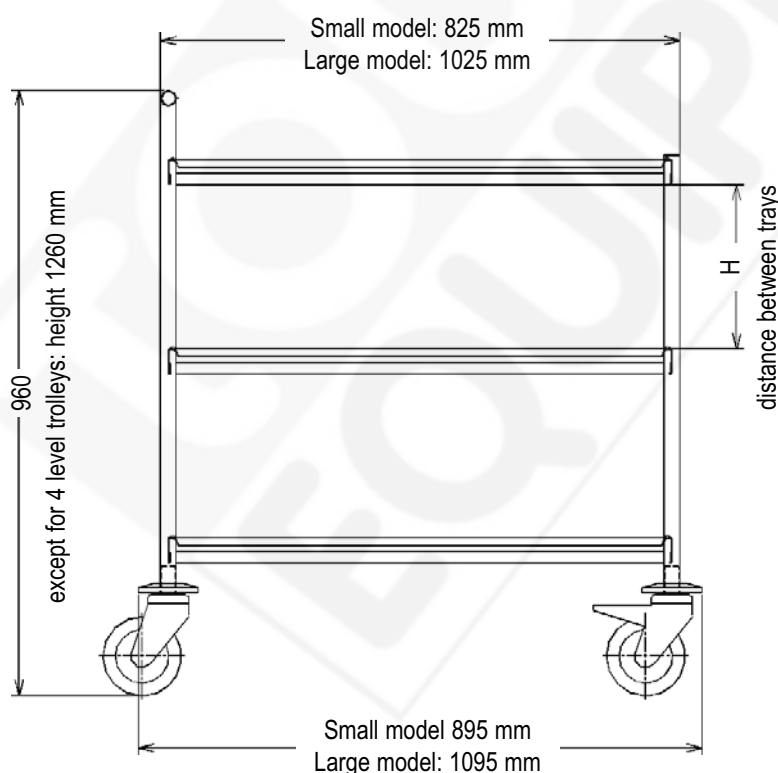

Non-contractual document. The specifications given are subject to change with a view to improvement without notice.

TOURNUS EQUIPEMENT-25 avenue Jean Moulin-B.P.59 F-71700
TOURNUS - Tel +33 (0)3 85 27 42 65 - Fax +33 (0)3 85 27 42 60
FRANCE