


MERCHANDISER REQUIRES A MINIMUM VENTILATION VOID OF 100mm ABOVE AND 50mm BEHIND UNIT FOR HEAT TO ESCAPE.

PLAN VIEW


Ventilation / Display Performance Considerations

- 1) Area in which display is to be sited must have a minimum room volume no less than 72 cu m.
- 2) Install over a sealed floor or ventilated floor void.
- 3) Do not site the display within 2m of ceiling mounted air conditioning grilles.
- 4) Do not site the display beneath a high level of direct sunlight.
- 5) Display will operate in a 24 hour environment.

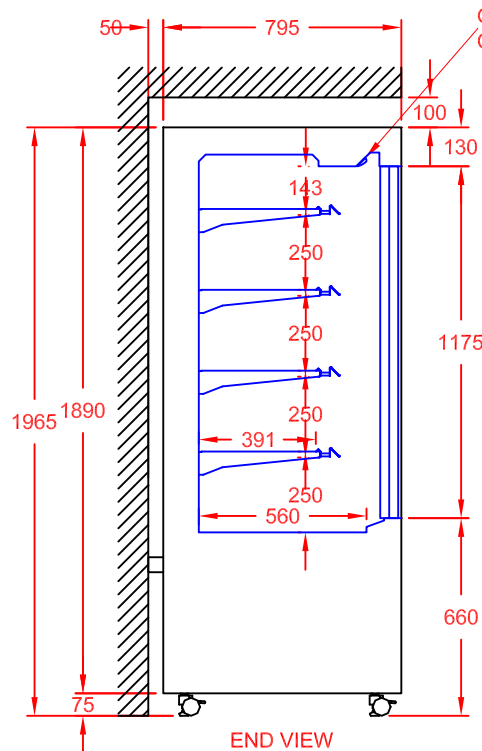


END VIEW

GANTRY MOUNTED DIGITAL CONTROL PANEL

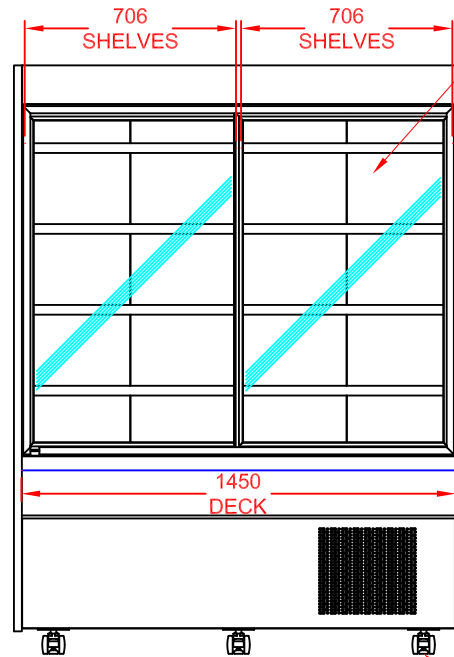

FRONT VIEW
(CUSTOMER SIDE)

DOUBLE GLAZED
SLIDING FRONT
DOORS

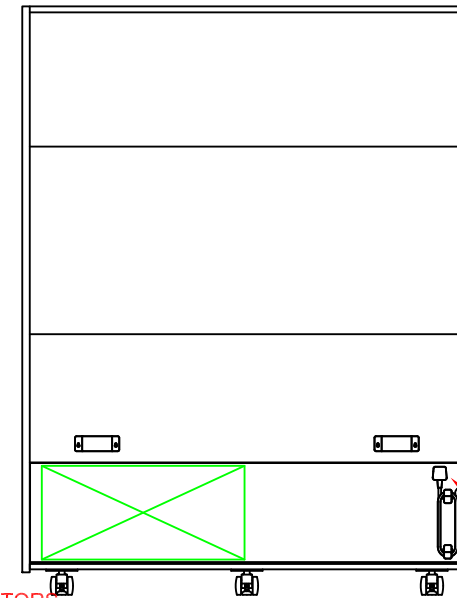

REAR VIEW
(OPERATOR SIDE)

13A PLUG TOP
& 2m LEAD
POWER SUPPLY:
13A, 230V, 1.70kW

CAPACITY: 700L

APPROX. UN-CRATED
WEIGHT OF UNIT: 311Kg

DESCRIPTION:

MONEY MAKER CHILLED MERCHANDISER
1500mm 4 TIER LARGE (FRONT DOORS)
HYDROCARBON TYPE-R290 REFRIGERANT

SCALE: 1 : 2.5 @ A4 REV No: A

PRODUCT
CODE: MM1500LDHT



CED FABRICATIONS LTD
UNITS A1-A4, FALCON COURT
CLAYTON BUSINESS PARK
CLAYTON-LE-MOORS
HYNDBURN
LANCASHIRE BB5 5JD

This drawing and information herein is confidential to CED Fabrications Ltd. It is issued in confidence that it will not be disclosed to any third party in part or in whole without permission from CED FABRICATIONS Ltd.

© CED FABRICATIONS LTD

