

TM65

Mid-level Report




KMDF5HT+AF2: 5-1Gn Kubus Cold Multideck 1875mm - Fixed Back (Self Help) + (Airflow Kit In/Out Operator Side)

Assessment Date 31/10/2025

Manufacturer CED Fabrications

Contact Email sales@cedlimited.com

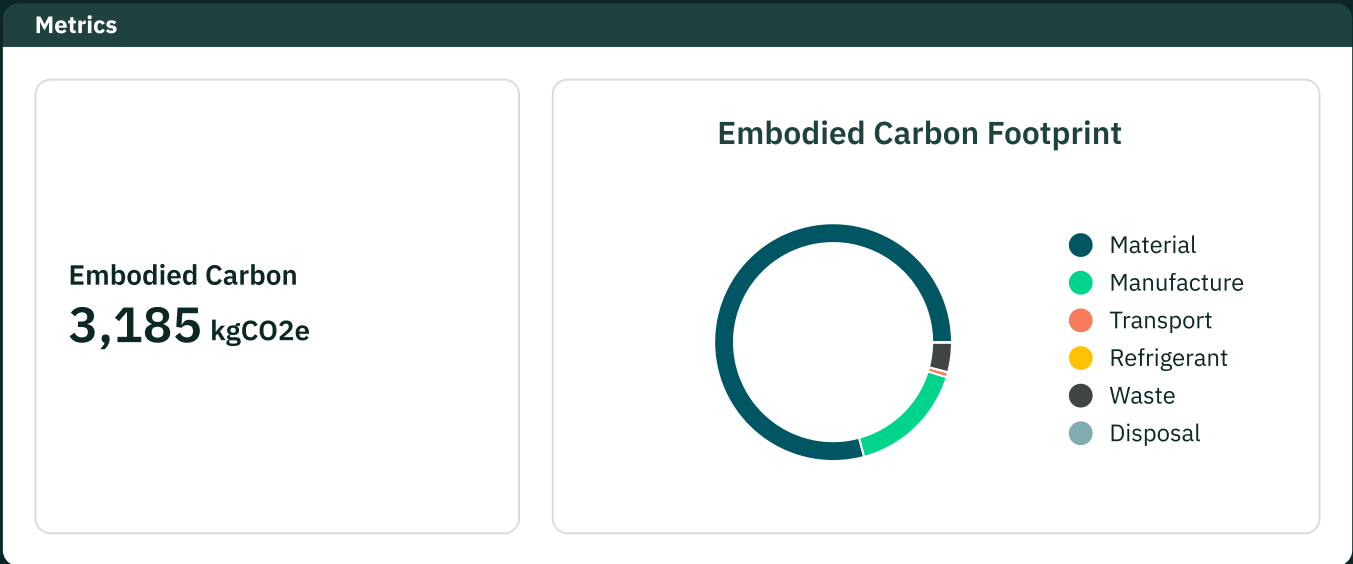

Product Information	
Capacity of equipment/size (kW; m3; litres; etc.)	N/A
Product weight (kg)	284 kg
Material % breakdown for at least 95% of the product weight? (Y/N)	Y
Product service life (years)	10
If refrigerant based, type of refrigerant used and GWP	Propane (R 290), No refrigerant, 0.04 kgCO2e
Refrigerant charge (kg)	0.69 kg
Energy consumption of the factory* per unit of product	330 kWh
Location of manufacture*	N/A
Product complexity category	3

Embodied carbon results (kg CO2e) – breakdown	
A1: Material extraction	1,422 kgCO2e
A2: Transport	225 kgCO2e
A3: Manufacturing	356 kgCO2e
A4: Transport to site	11 kgCO2e
A5: Construction	N/A
B1: Refrigerant leakage during use	0.55 kgCO2e
B2: Maintenance (if information given by manufacturer)	N/A
B3: Repair	341 kgCO2e
B4: Replacement	N/A
B5: Refurbishment	N/A
B6: Operational energy	N/A
B7: Operational water	N/A
C1: Refrigerant leakage when decommissioning	0.03 kgCO2e
C2: Transport	4 kgCO2e
C3: Waste processing	89 kgCO2e
C4: Disposal	1 kgCO2e
Embodied carbon results (kg CO2e) – without refrigerant leakage	
A1–C4 without buffer factor (excluding B1, C1)	2450 kgCO2e
A1–C4 with buffer factor (excluding B1, C1)	3184 kgCO2e
Embodied carbon result (kg CO2e) – refrigerant leakage only	
B1 (refrigerant leakage during use) + C1 (refrigerant leakage at end of life)	1 kgCO2e
Embodied carbon result with 'mid-level' calculation method – total	
Result of 'mid-level' calculation method	3,185 kgCO2e
Assumptions	
A1: Material carbon coefficient source	CIBSE TM65, Table 2.1
B1: Refrigerant annual leakage rate (%)	N/A
C1: Refrigerant end of life recovery rate (%)	N/A
B3: Materials replaced as part of repair (%)	56
C4: Percentage of product going to landfill (%)	55